

GMW115 Carbon Dioxide Transmitter for Demand-controlled Ventilation



The Vaisala CARBOCAP® Carbon Dioxide Transmitter GMW115 is a wall-mounted CO₂ transmitter for demand-controlled ventilation.

Features/Benefits

- Compact, wall-mounted transmitter for demand-controlled ventilation
- Incorporates Vaisala CARBOCAP®, the silicon based NDIR sensor with unique internal referencing
- Advanced, single-beam, dual wavelength measurement with no moving parts
- Excellent long-term stability
- Ideal for ventilation control in all types of occupied spaces

Most of us spend 90 % of our time indoors. Consequently, good indoor air quality is important to our wellbeing. All human beings produce carbon dioxide gas by respiration, thus the carbon dioxide level can be used as an indicator for indoor human presence. A high CO₂ level is a sign of poor ventilation and often an indication of other unpleasant odors in the air. In many buildings the ventilation need varies throughout the day. Demand controlled ventilation is an economical way to ensure good air quality.

The Vaisala CARBOCAP® CO₂ sensors have been proven to be accurate and durable. They have an excellent long-term stability, which decreases maintenance. The superior performance of Vaisala CARBOCAP® sensors results largely

from the stable reference provided by the electrically tunable Fabry-Perot Interferometer (FPI).

The tunable FPI filter measures CO₂ absorption, and simultaneously a reference wavelength. This internal reference measurement compensates effectively for any changes in the optical path, such as light source intensity changes and contamination. In the HVAC market, this type of reference measurement is a unique feature to Vaisala CARBOCAP® products, distinguishing them from competitors' comparative products that do not have a reference measurement at all, or have an indirect reference measurement, which is based on an assumed background CO₂ levels. In buildings with around-the-clock occupancy (e.g. hospitals, work-places, residential buildings, retirement homes), the assumed background CO₂ level reference is simply not applicable. The true internal reference measurement of Vaisala CARBOCAP® CO₂ transmitters provides years of stable CO₂ measurements.

The GMW115 Transmitter is designed especially for DCV (Demand Controlled Ventilation) applications with two optional CO₂ measurement ranges of 0...2000 ppm and 0...5000 ppm.

Technical data

Performance

CO ₂ -measurement range	0 ... 2000 ppm 0.....5000 ppm
Accuracy (including repeatability, non-linearity and calibration uncertainty)	± (2,5 % of range + 3 % of reading)
Long-term stability	± 5 % of range/5 years
Response time T90	1 min
Temperature dependence, typical	-0,35 % of reading / °C
Pressure dependence, typical	+0,15 % of reading/hPa
Warm-up time	1 min, 10 min for full specification
Product lifetime	> 10 years

Operating environment

Temperature	-5 ... +45 °C (23 ... 113 °F)
Humidity	0 ... 85 % RH
Pressure	700 ... 1200 hPa
Electromagnetic compatibility	Complies with EMS standard EN61326-1, Generic Environment

Inputs and outputs


Operating voltage	24 V (±20 %) AC/DC
Power consumption	<2 W
Outputs	4 ... 20 mA, 0 ... 10 V, RS-485, 2-wire, non-isolated

Housing

Material:	ABS plastics
Colour:	Cyclac 233599/NCS 0502-G50Y
Fire resistance:	UL94 HB
Ingress protection:	IP30

Dimensions

Dimensions in mm

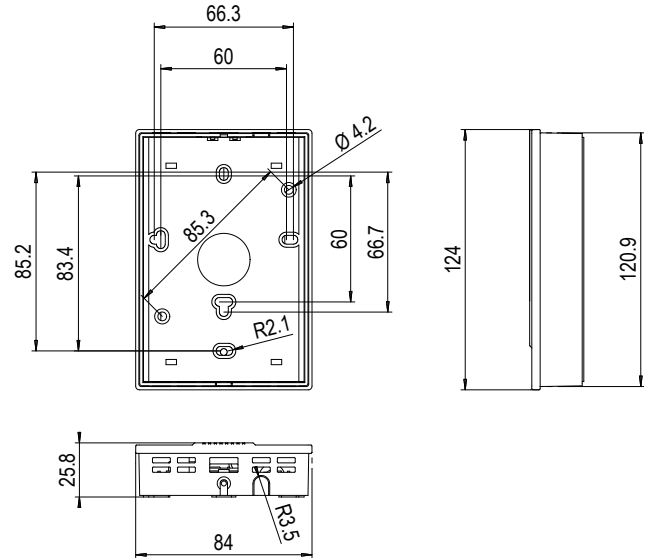

VAISALA

For more information, visit
www.vaisala.com or contact
 us at sales@vaisala.com

Ref. B210568EN-C ©Vaisala 2009

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

